



# 14520 Series Magnetic Drive Pump • Ask us about available OEM options

Specifications	
Flow Rates	Max Range: 26 gpm
	Max Head: 35 ft
	Max Sys. Pressure: 75 psi
Fluid Temp. Max	203°F (95°C)
Materials in contact with solution / OEM options	
Body	Ryton®
Impeller	Ryton® with Epoxy adhesive
Adaptor	Ryton®
Pump Shaft	Ceramic
Impeller Bearings	Resin Impregnated Carbon
Front Thrust Bearings	Glass-Filled Teflon®
Rear Thrust Bearings	Ceramic
O-Rings (Elastomers)	<ul style="list-style-type: none"> <li>• EPT/EPDM</li> <li>• Viton®/Fluoroelastomer</li> <li>• Nitrile</li> <li>• Neoprene</li> <li>• Silicone</li> <li>• Kel-F®</li> </ul>
Motor specifications / OEM options	
Motor Specs	<ul style="list-style-type: none"> <li>• 115V, 50/60 hz</li> <li>• 230V, 50/60 hz</li> <li>• Vented</li> <li>• Shaded pole</li> <li>• Thermally protected</li> <li>• Tefc/psa</li> </ul>
Features	
Corrosion Resistant	Quiet operation
Hydraulically efficient	Flexible mounting and body discharge positions
No shaft seals	NSF certified models available
Low current draw and heat rise	

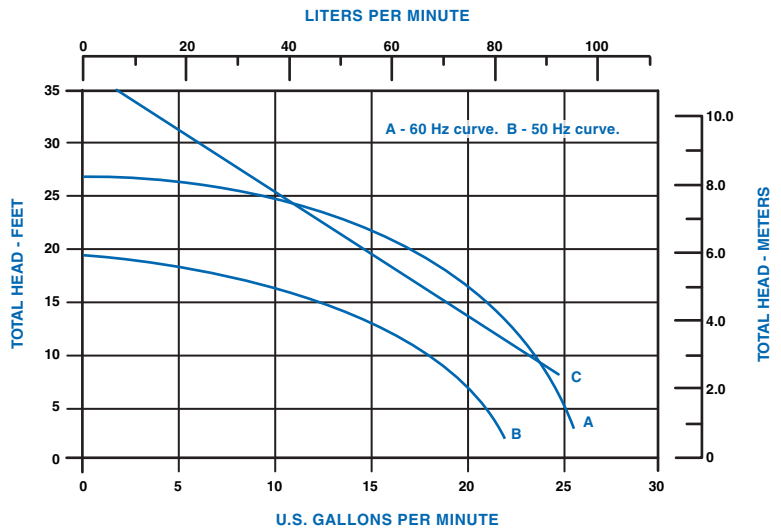

# 14520 Series Magnetic Drive Pump • Ask us about available OEM options

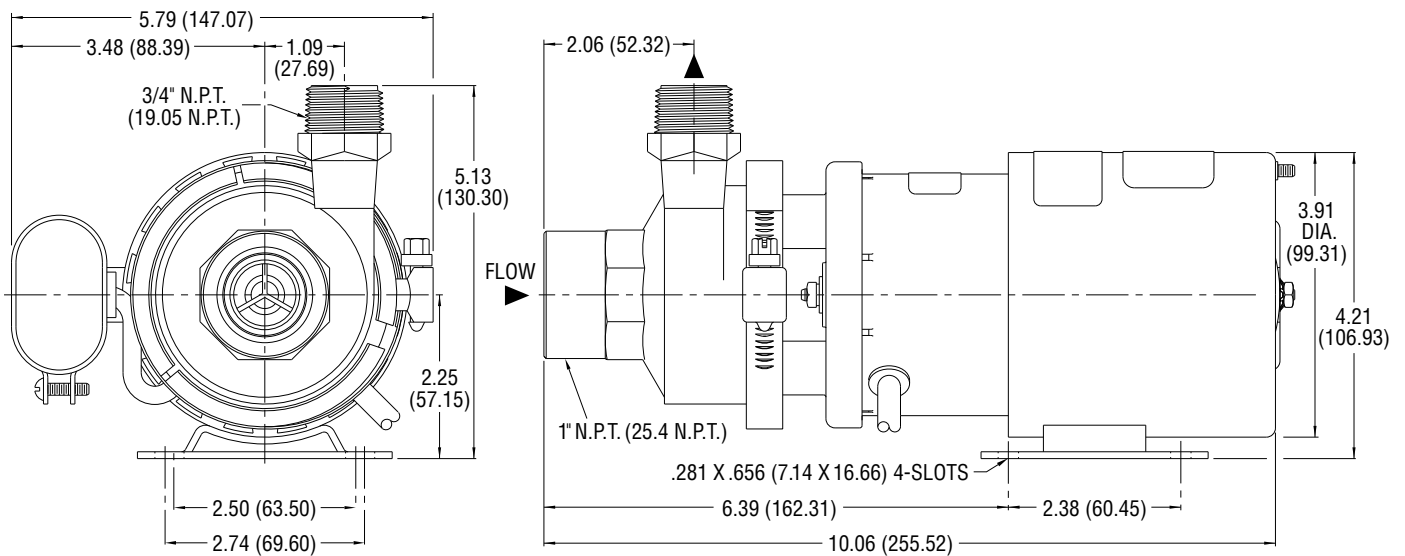

Dimensions in Inches  
 (Dimensions in Millimeters)

